



Model No : NEO-K-430U

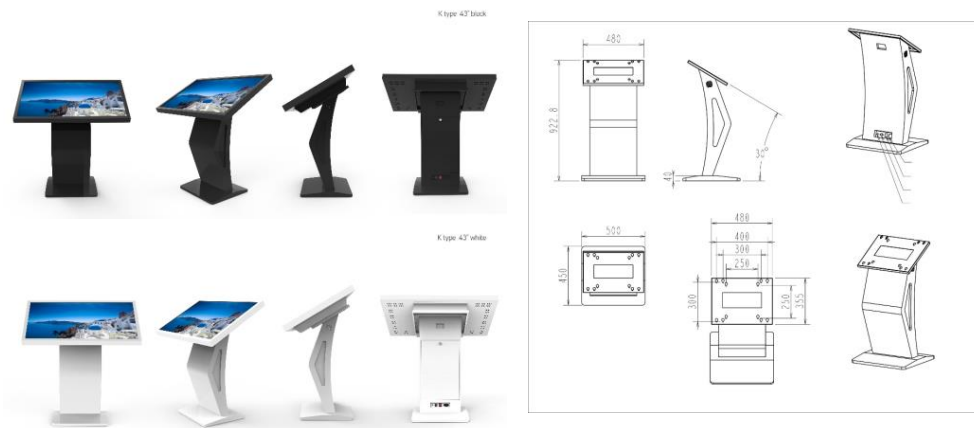


| Specifications | |
|-------------------------------------|--|
| Model No. | NEO-K-430U |
| Panel size | 43" TFT-LED |
| Panel Manufacturer | BOE DISPLAY |
| Product Dimension[W*H*D] (mm) | 500 x 922.8 x 450(발판)mm |
| Active Display area(mm)/mode | 940.896(H) x 529.254(V) (mm)/16:9 |
| Display Component Dimension (mm) | 1000.6 x 589.6 x 89.2 |
| Maximum resolution | 1920 x 1080 |
| Display color | 16.7M |
| Pixel Pitch(mm) | 163.35(H) x 490.05(V) |
| Brightness(nits) | 400cd/m ² |
| Weight(kg) | 39 |
| Contrast | 1100:1 |
| Visual angle | 178°/178° |
| Response time | 12ms |
| Life(hrs) | >50,000(hrs) |
| Speaker | 2 x 5W (10W) |
| I/O Port | |
| HDMI | 2 |
| DP, DVI, RS232 etc. | RGB * 1 |
| Power INLET | 1 |
| USB2.0 | 2 |
| USB Advertising Board Specification | |
| CPU | A9 Single Core 1GHz |
| STORAGE | NAND FLASH 8GB |
| MEMORY | DDR3 256Mbyte |
| Support Type | |
| Audio Format | MP3, MP2, WMA, WAV, etc. |
| Image Format | JPEG, PNG, etc. |
| Video Format | MPEG2, AVI, MP4, DIV, TS, TRP, MKV, MOV, DAT, ASF, WMV, etc. |
| Support function | Schedule management, split screen, etc. |
| Power | |
| Power supply | AC100V ~ 240V, 50/60Hz |
| Maximum power consumption | ≒ 63W |
| Standby power consumption | ≒ 3W |
| Temperature | |
| Working temperature | 0°C~50°C |
| Storage temperature | -10°C~55°C |
| Working humidity | 20%~80% |
| Storage humidity | 5%~90% |
| Appearance | |
| Cabinet color/appearance | BLACK, WHITE |
| Cabinet material | STEEL, Powder Coating |
| Installation | Wall Mount, Ceiling |
| Others | |
| Payment terms | Discussion |
| Warranty | 1Year |
| Valid time | 15Days |

Model No : NEO-K-430N

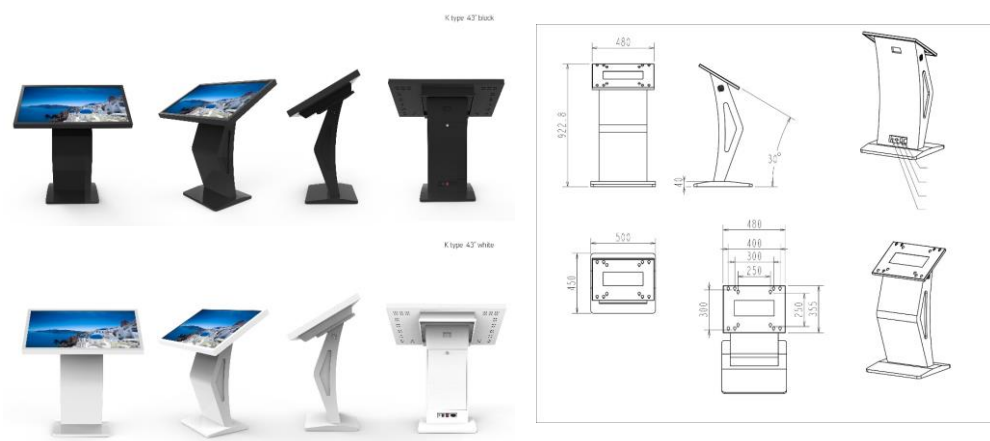


| Specifications | |
|--------------------------------------|--|
| Model No. | NEO-K-430N |
| Panel size | 43" TFT-LED |
| Panel Manufacturer | BOE DISPLAY |
| Product Dimension[W*H*D] (mm) | 500 x 922.8 x 450(발판)mm |
| Active Display area(mm)/mode | 940.896(H) x 529.254(V) (mm)/16:9 |
| Display Component Dimension (mm) | 1000.6 x 589.6 x 89.2 |
| Maximum resolution | 1920 x 1080 |
| Display color | 16.7M |
| Pixel Pitch(mm) | 163.35(H) x 490.05(V) |
| Brightness(nits) | 400cd/m ² |
| Weight(kg) | 39 |
| Contrast | 1100:1 |
| Visual angle | 178°/178° |
| Response time | 12ms |
| Life(hrs) | >50,000(hrs) |
| Speaker | 2 x 5W (10W) |
| I/O Port | |
| HDMI | 2 |
| DP, DVI, RS232 etc. | RGB * 1 |
| Power INLET | 1 |
| USB2.0 | 1 |
| RJ45 | 1 |
| Embedded Network Board Specification | |
| OS | Embedded Linux |
| CPU | SMP8671A |
| MEMORY | SD 16GB |
| WIFI | OPTION(USB Port Use) |
| Support Type | |
| Audio Format | MP3, MP2, WMA, WAV, etc. |
| Image Format | JPEG, PNG, etc. |
| Video Format | MPEG2, AVI, MP4, DIV, TS, TRP, MKV, MOV, DAT, ASF, WMV, etc. |
| Support function | Network Control, Schedule management, split screen, etc. |
| Power | |
| Power supply | AC100V ~ 240V, 50/60Hz |
| Maximum power consumption | ≦ 65W |
| Standby power consumption | ≦ 3W |
| Temperature | |
| Working temperature | 0°C~50°C |
| Storage temperature | -10°C~55°C |
| Working humidity | 20%~80% |
| Storage humidity | 5%~90% |
| Appearance | |
| Cabinet color/appearance | BLACK, WHITE |
| Cabinet material | STEEL, Powder Coating |
| Installation | Wall Mount, Ceiling |
| Others | |
| Payment terms | Discussion |
| Warranty | 1Year |
| Valid time | 15Days |

Model No : NEO-K-430P

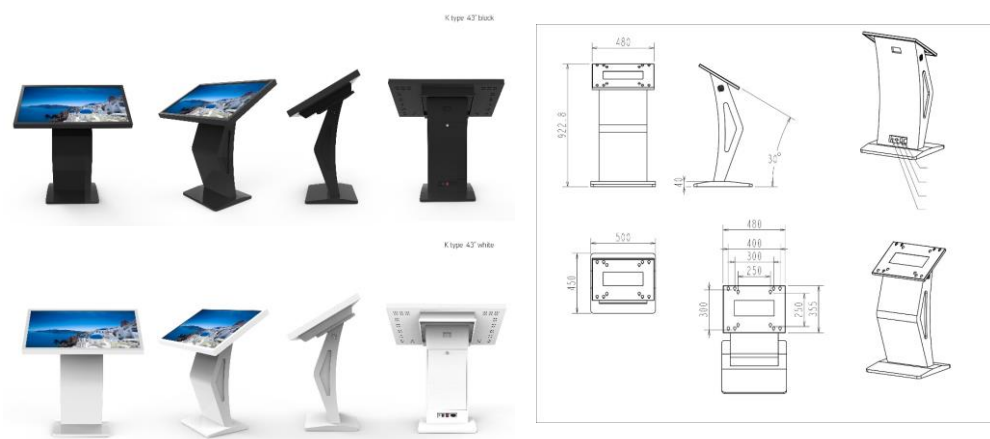

| Specifications | |
|----------------------------------|---|
| Model No. | NEO-K-430P |
| Panel size | 43" TFT-LED |
| Panel Manufacturer | BOE DISPLAY |
| Product Dimension[W*H*D] (mm) | 500 x 922.8 x 450(발판)mm |
| Active Display area(mm)/mode | 940.896(H) x 529.254(V) (mm)/16:9 |
| Display Component Dimension (mm) | 1000.6 x 589.6 x 89.2 |
| Maximum resolution | 1920 x 1080 |
| Display color | 16.7M |
| Pixel Pitch(mm) | 163.35(H) x 490.05(V) |
| Brightness(nits) | 400cd/m ² |
| Weight(kg) | 39 |
| Contrast | 1100:1 |
| Visual angle | 178°/178° |
| Response time | 12ms |
| Life(hrs) | >50,000(hrs) |
| Speaker | 2 x 5W (10W) |
| I/O Port | |
| HDMI | 2 |
| DP, DVI, RS232 etc. | RGB * 1 |
| Power INLET | 1 |
| USB2.0 | 2 |
| RJ45 | 1 |
| PC Specification | |
| CPU | Intel i3 / Windows 10 Pro |
| GPU | Intel UHD Graphics 630 |
| MEMORY | DDR4 4GB |
| STORAGE | SSD 128GB |
| Support Resolution | HDMI(4096x2304@24Hz), DP(4096x2304@60Hz) |
| WIFI | OPTION(USB Port Use) |
| Support Type | |
| DID Solution | DIDMATE PLAYER |
| Audio Format | MP3, MP2, WMA, WAV, etc. |
| Image Format | JPEG, PNG, etc. |
| Video Format | PPT, PDF, PLASH, MPEG2, AVI, MP4, MOV, DAT, ASF, WMV, etc |
| Support function | Auto on/off, Schedule management, split screen, Network Control, etc. |
| Power | |
| Power supply | AC100V ~ 240V, 50/60Hz |
| Maximum power consumption | ≦ 70W |
| Standby power consumption | ≦ 3W |
| Temperature | |
| Working temperature | 0°C~50°C |
| Storage temperature | -10°C~55°C |
| Working humidity | 20%~80% |
| Storage humidity | 5%~90% |
| Appearance | |
| Cabinet color/appearance | BLACK, WHITE |
| Cabinet material | STEEL, Powder Coating |
| Installation | Wall Mount, Ceiling |
| Others | |
| Payment terms | Discussion |
| Warranty | 1Year |
| Valid time | 15Days |

Model No : NEO-K-430PT

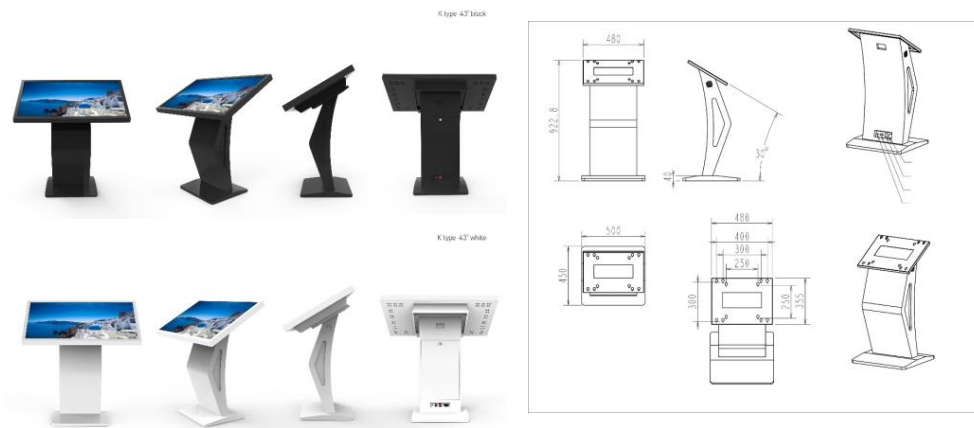

| Specifications | |
|----------------------------------|---|
| Model No. | NEO-K-430PT |
| Panel size | 43" TFT-LED |
| Panel Manufacturer | BOE DISPLAY |
| Product Dimension[W*H*D] (mm) | 500 x 922.8 x 450(발판)mm |
| Active Display area(mm)/mode | 940.896(H) x 529.254(V) (mm)/16:9 |
| Display Component Dimension (mm) | 1000.6 x 589.6 x 89.2 |
| Maximum resolution | 1920 x 1080 |
| Touch Sensor(Response time) | IR 10Point (<10m/s) |
| Display color | 16.7M |
| Pixel Pitch(mm) | 163.35(H) x 490.05(V) |
| Brightness(nits) | 400cd/m ² |
| Weight(kg) | 44 |
| Contrast | 1100:1 |
| Visual angle | 178°/178° |
| Response time | 12ms |
| Audio(L/R) output | 2 x 5W (10W) |
| Life(hrs) | >50,000(hrs) |
| Speaker | 2 x 5W (10W) |
| I/O Port | |
| HDMI | 2 |
| DP, DVI, RS232 etc. | RGB * 1 |
| Power INLET | 1 |
| USB2.0 | 2 |
| RJ45 | 1 |
| PC Specification | |
| CPU | Intel i3 / Windows 10 Pro |
| GPU | Intel UHD Graphics 630 |
| MEMORY | DDR4 4GB |
| STORAGE | SSD 128GB |
| Support Resolution | HDMI(4096x2304 @24Hz), DP(4096x2304 @60Hz) |
| WIFI | OPTION(USB Port Use) |
| Support Type | |
| Web solution | DIDMATE PLAYER / Customized touch web solution |
| Audio Format | MP3, MP2, WMA, WAV, etc. |
| Image Format | JPEG, PNG, etc. |
| Video Format | PPT, PDF, PLASH, MPEG2, AVI, MP4, MOV, DAT, ASF, WMV, etc |
| Camera | Auto on/off, Schedule management, split screen, Network Control, etc. |
| Power | |
| Power supply | AC100V ~ 240V, 50/60Hz |
| Maximum power consumption | ≒ 70W |
| Standby power consumption | ≒ 3W |
| Temperature | |
| Working temperature | 0°C~50°C |
| Storage temperature | -10°C~55°C |
| Working humidity | 20%~80% |
| Storage humidity | 5%~90% |
| Appearance | |
| Cabinet color/appearance | BLACK, WHITE |
| Cabinet material | STEEL, Powder Coating |
| Installation | Wall Mount, Ceiling |
| Others | |
| Payment terms | Discussion |
| Warranty | 1Year |
| Valid time | 15Days |